

AFTERCARE

Keep it looking new.



Let it settle.

Follow your installer's curing and first-wash instructions.



Wash gently.

Use a soft mitt and film-safe shampoo. Keep pressure jets away from edges.



Act early.

Remove bird droppings and insect residue promptly. Ask your installer about stubborn marks.


THE PCU ADVANTAGE

A supple PCU film designed to follow every curve. Clear protection with soft handling and enhanced resistance to yellowing.

WHAT IS PCU?

PCU means polycarbonate-based polyurethane. Nova uses this supple material to follow complex curves, with enhanced resistance to yellowing and a clear finish.

Ask your installer to recommend coverage and confirm the right finish for your car.



Explore the range.
Visit our website.

vznvinyl.com

10-year VZN warranty. Terms apply.
Confirm coverage and registration with your installer.

VZN

PAINT PROTECTION FILM

Nova PCU

Softer film. Lasting clarity.



7.5

mil

Installed film

10

years

VZN warranty*

PCU clear paint protection film.

*Warranty terms apply.

OPEN TO EXPLORE

PCU. Clear by design.



Enhanced yellowing resistance

Helps preserve the film's clarity.



Supple PCU construction

Soft handling for a carefully fitted finish.



Heat-assisted self-healing

Helps smooth minor surface marks.

YOUR FINISH. YOUR CHOICE.

For drivers who value lasting clarity and a carefully fitted finish.

PPF reduces everyday wear; it cannot prevent every impact or deep scratch.

Softer PCU. Sculpted fit.



PRECISION FIT

Film shaped to follow the bodywork.

What makes it PCU?


Polycarbonate-based polyurethane: a supple film that follows complex bodywork while helping resist yellowing.

The PCU core. Layer by layer.

7.5 mil PCU

- Polycarbonate-based polyurethane
- Soft handling
- Enhanced yellowing resistance

A protective skin, ready to dress every curve.

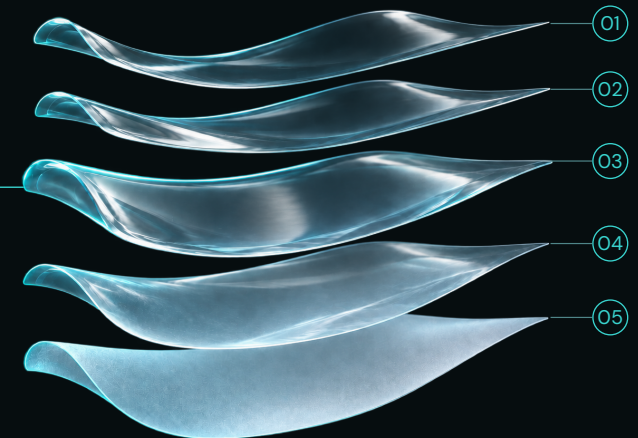

01	Removable protective film	1.50 mil / 38.10 um
02	Self-healing coat	0.30 mil / 7.62 um
03	PCU protective core	6.20 mil / 157.48 um
04	Acrylic adhesive	1.00 mil / 25.40 um
05	Release liner	3.00 mil / 76.20 um

Installed total: 7.5 mil / 190.5 um.

Protective handling film and release liner are removed.
Diagram not to scale.